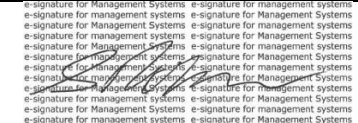


### Declaration of Performance

DoP Reference:	<b>20PFP141002</b>	
1. Unique identification code of the product-type	<b>PassiveTec NT Sealant</b>	
2. Type, batch or serial number or other element allowing identification of the construction product – Article 11(4)	<b>See product label and associated documents</b>	
3. Intended use or uses of the construction product as foreseen by the manufacturer	<b>Non-structural facade sealant intended for sealing exterior wall joints, window and door perimeter joints in building construction, including the interior face (intended for use in cold climates)</b>	
4. Name, registered trade name or trade mark and contact address of the Manufacturer – Article 11(5)	<b>PassiveTec (SIG plc) Hillsborough works, Langsett Road, Sheffield S6 2LW</b>	
5. Name and address of the authorised representative whose mandate covers the tasks specified in Article 12(2)	<b>Not relevant</b>	
6. System of assessment and verification of constancy of the construction products as set out in Annex V	<b>System 3</b>	
7. Name and identification number of the Notified Body concerning a construction product covered by a harmonised standard	<b>Tecnalia NB1292</b>	
	performed	<b>determination of the product-type on the basis of type testing</b>
	to system	<b>System 3</b>
8. Name and identification number of the Technical Assessment Body concerning a construction product covered by a Technical Assessment	Issued	<b>Test report and Classification report</b>
		<b>Not relevant</b>
	ETA ref.	<b>Not relevant</b>
	basis	<b>Not relevant</b>
	performed	<b>Not relevant</b>
		<b>Not relevant</b>
	to system	<b>Not relevant</b>
	Issued	<b>Not relevant</b>
9. Declared performance according to:	<b>EN 15651-1:2012 Type F-EXT-INT Class 12,5P</b>	
<b>Essential Characteristic</b>	<b>Performance</b>	<b>Test Standard</b>
<b>Test conditioning: Method A</b>		
<b>Substrate: mortar M2 without primer</b>		
<b>Reaction to fire</b>	<b>Class B</b>	<b>EN 13501-1:2007+A1</b>
<b>Water tightness and air tightness: Resistance to flow</b>	<b>≤3 mm</b>	<b>modified EN ISO 7390</b>
<b>Water tightness and air tightness: Loss of volume</b>	<b>≤ 25%</b>	<b>EN ISO 10563</b>
<b>Tensile properties (i.e. elongation): after immersion in water at (23 °C)</b>	<b>≥ 100%</b>	<b>EN ISO 10591</b>
<b>Durability</b>	<b>Pass</b>	<b>EN ISO 8339, EN ISO 8340, EN ISO 9047, EN ISO 10590</b>
<b>All other essential characteristics not identified above</b>	<b>N.P.D.</b>	<b>N.P.D. = No Performance Declared</b>

10. The performance of the product identified in point 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance issued under the sole responsibility of the manufacturer identified in point 4.	Signed on behalf of the manufacturer	
	Name & function of signatory	<b>Spencer Robinson – Operations Director</b>
	Date & place of issue	<b>05/12/2015 - Sheffield</b>